

SCHULTE®

R O C K W I N D R O W E R S

SRW-1400 • SRW1000 • SRW-800 • SMR-800 • SMR-600



World Class *Built to Last*

schulte.ca

SRW-1400 Windrower

14' Windrower forms Convenient Rows for Rock Picking



The SRW-1400 Pivoting Rock Windrower employs a side delivery frame arrangement which allows the operator to better control the size of windrows, regardless of rock conditions. The windrower's patented floating drum arrangement allows the wheels to be placed closer to the windrower drum, resulting in excellent ground following characteristics.

Optional Gravel reclamation configuration is a good fit for Rural Municipalities and counties to reclaim gravel from roadsides. Save money by using your grader to bring the gravel in off the shoulder and then using the Schulte SRW-1400 Pivoting Rock Windrower to spread the ridge smoothly and evenly.

Power is supplied to the windrower drum via a heavy duty PTO driveline which includes a slip clutch and shear bolt arrangement for protection against excessive shock loads.

The windrower drum is 14' (4.27m) wide and is constructed of 8 5/8" (219mm) heavy wall HSS tube.

Hard surfaced, 5/8" (15.9mm) x 6" thick x 6" (152.4mm) long teeth are welded directly to the drum pipe, resulting in problem-free operation even in difficult conditions.



SRW-1000 Windrower

Roto-Tilling Action Breaks Lumps & Levels the Ground

Windrows 2" to 25" rocks with ease, forming them into neat uniform rows.


Power is supplied to the windrower drum via a heavy duty PTO driveline which includes a slip clutch and shear bolt arrangement for protection against excessive shock loads.

The final drive chain is totally enclosed for longer service life. The windrower drum is 10' (3.05m) wide and is constructed of 8 5/8" (219mm) heavy wall HSS tube.

Hard surfaced, 5/8" (15.9mm) x 6" thick (152.4mm) long teeth are welded directly to the drum pipe, resulting in problem-free operation even in difficult conditions.

Good choice for RM's and Counties for gravel reclamation.

Cat III hitch configuration available, perfect for larger hp tractors such as RM's and County fleets.

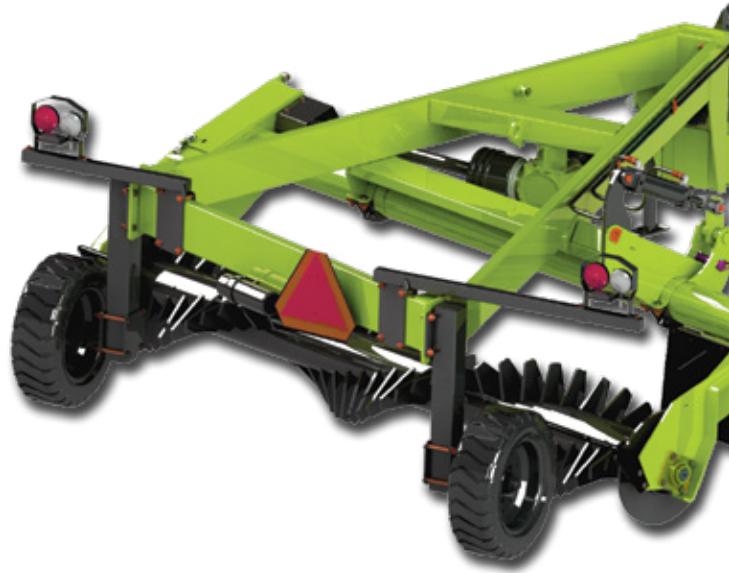

SRW-800 Windrower

Multi Purpose 3-Point Hitch Windrower Breaks Lumps & Levels Ground



The SRW-800 Pivoting Rock Windrower is designed to windrow small to medium rocks with ease, forming them into neat uniform rows ready for pickup by a Schulte Rock Picker. Roots, stumps, chips and other debris from land clearing operations can also be windrowed. As an added bonus, the windrower has roto-tilling action breaking up lumps and leveling the ground.

Power is supplied to the windrower drum via a heavy duty PTO driveline which includes a slip clutch and shear bolt arrangement for protection against excessive shock loads. The final drive chain is totally enclosed for longer service life. The windrower drum is constructed of 8 5/8" (219mm) heavy wall pipe, hard surfaced 5/8" (15.9 mm) thick teeth welded directly to the drum.

Narrow, 8.5' transport width.

The SRW-800 Pivoting Rock Windrower employs a side delivery frame allowing the operator to better control the size of windrows, regardless of rock conditions. The SRW800 is the perfect tool for contractors, landscape companies and farmers.



Heavy duty PTO driveline



Fully enclosed final drive chain



SMR-800 Windrower

A Perfect Tool for Any of Your Land Maintenance Needs

The rototilling action of the SMR-800 breaks lumps, roots and other debris while reclaiming rocks by forming them in uniform rows.

The 4" teeth give you greater ground penetration and are made of wear resistant Hardox 450.

The SMR-800 is chain driven to keep the hydraulic motor out of harm's way.

Option for standard solid mount or floating mount that can pivot up to 20° left or right, manually or hydraulically.

Solid mounted or hydraulic lifting 23" forklift grade tires for increased maneuvering and rugged durability.

High or low flow hydraulic options.

Available in Cat III hitch for smaller hp tractors.



Standard Mount Shown




Optional broom attachment for sweeping parking lots, roads or removing snow



Drum angle movement 20° left or right



Replaceable teeth
4" & 2 1/2"



Before Multi Rake use



After Multi Rake use



SMR-600 Windrower

The Perfect Tool for Your Skid Steer Landscaping & Sweeping



The rototilling action of the SMR-600 & SMR-800 breaks lumps, roots and other debris while reclaiming rocks by forming them in uniform rows.

The 4" teeth give you greater ground penetration and are made of wear resistant Hardox 450.

The SMR-600 & SMR-800 are chain driven to keep the hydraulic motor out of harm's way.

Option for standard solid mount or floating mount that can pivot up to 20 degrees left or right, manually or hydraulically.

Solid mounted or hydraulic lifting 23" forklift grade tires for increased maneuvering and rugged durability.

High or low flow hydraulic options.

Sweeper option is available.



Great for land use preparation



Floating mount



Replaceable teeth
4" & 2 1/2"



Gearbox features reversible tensioner and heavy 80 chain which decreases downtime.



Schulte Rock Pickers

Match your Schulte Windrower with a Schulte Conveyor Type or Reel Type Rock Picker

5000 Titan



RS-320



High Rise 8000



2500 Giant



Specifications

SPECIFICATIONS

Weight
Tractor Horsepower
Drum Width
Maximum Ground Speed
Recommended Ground Speed
Drum Speed
Tires
Transport Width
Transport Length
Hydraulic Low Flow Option
Hydraulic High Flow Option



SRW-1400

3500lb (1588kg)
40-150HP (30-112KW)
14' (4270mm)
5mph (8 kph)
2mph (3kph)
117rpm @540rpm input
Light truck tires
93" (2.36m)
235" (5.97m)



SRW-1000

2660lb (1206kg)
40-150HP (30-112KW)
10' (3050mm)
5mph (8 kph)
2mph (3kph)
117rpm @540rpm input
22" Forklift tires (56cm)
134" (3.4m)
179" (4.55m)



SRW-800

1350lb (613kg)
35-100HP (30-60KW)
88 5/8" (2215mm)
5mph (8 kph)
2mph (3kph)
102rpm @540rpm input
16.5/6.5 x 8
102" (2.59m)
67" (1.7m)



SMR-800

1900lb (862kg)
-
89" (2.26m)
-
-
220-250rpm
23" forklift (58cm)
102" (2.59m)
1 5/8" (41mm)
18-24gpm (68lpm-90lpm)
28-38gpm (106lpm-144lpm)



SMR-600

1600lb (725kg)
-
73" (1.85m)
-
-
220-250rpm
23" forklift (58cm)
88" (2.23m)
-
18-24gpm (68lpm-90lpm)
28-38gpm (106lpm-144lpm)

OPTIONS - SRW-1400

Selector valve kit for tractors with single remote outlets • High speed sprocket for optional gravel reclamation configuration
• Safety light kit

OPTIONS - SRW-1000

High speed sprocket for optional gravel reclamation configuration • Cat III hitch for larger hp tractors

OPTIONS - SRW-800

Mount options: Standard mount • Floating mount • Joystick control for New Holland, John Deere & Cat • Forklift tires and arms
• Cat II hitch for smaller hp tractors • High speed sprocket for optional gravel reclamation configuration

OPTIONS - SMR-800

High speed sprocket for optional gravel reclamation configuration

OPTIONS - SMR-600

High speed sprocket for optional gravel reclamation configuration



Excellent for land preparation



Rototilling action



Legendary Schulte quality

SCHULTE

Schulte Industries Ltd.

PO Box 70, Englefeld, SK Canada S0K 1N0

Ph (306) 287-3715 Fx (306) 287-3355

Email info@schulte.ca Web www.schulte.ca



ISO 9001

Sold By: **ROSS UNIVERSUM, s.r.o.**
www.ross-universum.cz
www.schulte-agrotechnika.cz
Telephone: +420 602 430 291
Mail: info@agrotip.com

Schulte is a registered trademark of Alamo Group Inc.

Schulte Industries Ltd. reserves the right to change the design and specifications of its products without notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment.

Printed in Canada

Prepared by NELSON GRAPHIC DESIGN

201901

